

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 March 2001 (01.03.2001)

PCT


(10) International Publication Number  
WO 01/15303 A1

- (51) International Patent Classification<sup>7</sup>: H02K 5/136 (74) Agent: GARAVELLI, Paolo; A.Bre.Mar. S.r.l., Via Ser-  
vais, 27, I-10146 Torino (IT).
- (21) International Application Number: PCT/IT00/00318 (81) Designated States (*national*): AE, AG, AL, AM, AU, BA,  
BB, BG, BR, BZ, CA, CN, CR, CU, CZ, DM, DZ, EE, GD,  
(22) International Filing Date: 27 July 2000 (27.07.2000) GE, HR, HU, ID, IL, IN, IS, JP, KP, KR, LC, LK, LR, LT,  
LV, MA, MG, MK, MN, MX, NZ, PL, RO, SG, SI, SK, TR,  
(25) Filing Language: English TT, UA, US, VN, YU, ZA, ZW.
- (26) Publication Language: English (84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
(30) Priority Data: TO99A000719 19 August 1999 (19.08.1999) IT patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): EDEL- WEISS ITALIA S.R.L. [IT/IT]; Via Padergnone, 21, I-24040 Zanica (IT). Published:  
— With international search report.

- (72) Inventor; and  
(75) Inventor/Applicant (*for US only*): DE MARTINO, Bernardino [IT/IT]; Via Pascoli, 13, I-24068 Seriate (IT).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: ANTI-DEFLAGRATING OPERATING ACTUATOR

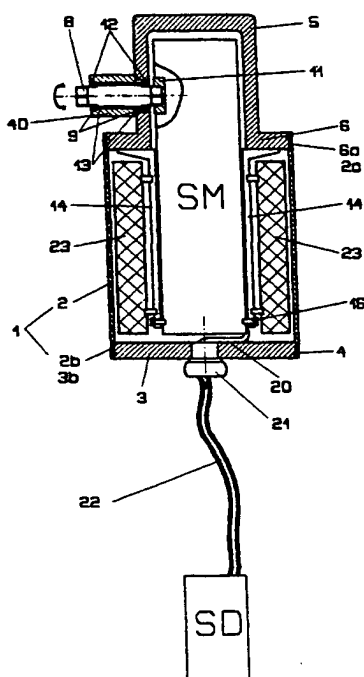

(57) Abstract: An anti-deflagrating operating actuator is disclosed, adapted to operate in environments where explosion risks occur, wherein both components that are subjected to electric voltage, and gear reducer, and the motion transmitting mechanism or the mechanism transforming rotary motion into linear motion, are integrally protected against deflagration.

WO 01/15303 A1

# INTERNATIONAL SEARCH REPORT

Intern. Application No  
PCT/IT 00/00318

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H02K5/136

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 325 659 A (WILLIAM A DOUGLAS) 13 June 1967 (1967-06-13)	1-4, 11
Y	the whole document	5, 7, 8
Y	GB 2 251 790 A (BEST INSPECTION LIMITED) 22 July 1992 (1992-07-22) page 3, line 22 -page 4, line 12	5, 7, 8
X	GB 2 230 392 A (CLIFFORD PETER DAVID; YOUNGE RUDER OSCAR) 17 October 1990 (1990-10-17) abstract	1
A	GB 2 303 972 A (LUTZ PUMPEN GMBH & CO KG) 5 March 1997 (1997-03-05) abstract; figure 3	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

24 November 2000

Date of mailing of the international search report

04/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Ramos, H

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/IT 00/00318

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3325659	A	13-06-1967	NONE	
GB 2251790	A	22-07-1992	NONE	
GB 2230392	A	17-10-1990	NONE	
GB 2303972	A	05-03-1997	DE 19527879 A FR 2737944 A	30-01-1997 21-02-1997

**(19) World Intellectual Property Organization  
International Bureau**



**(43) International Publication Date**  
**1 March 2001 (01.03.2001)**


**(10) International Publication Number**  
**WO 01/15303 A1**

**PCT**

- (51) **International Patent Classification<sup>7</sup>:** H02K 5/136
- (21) **International Application Number:** PCT/IT00/00318
- (22) **International Filing Date:** 27 July 2000 (27.07.2000)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
TO99A000719 19 August 1999 (19.08.1999) IT
- (71) **Applicant (for all designated States except US):** EDEL-WEISS ITALIA S.R.L. [IT/IT]; Via Badernone, 21, I-24040 Zanica (IT).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** DE MARTINO, Bernardino [IT/IT]; Via Pascoli, 13, I-24068 Seriate (IT).
- (74) **Agent:** GARAVELLI, Paolo; A.Bre.Mar. S.r.l., Via Servais, 27, I-10146 Torino (IT).
- (81) **Designated States (national):** AE, AG, AL, AM, AU, BA, BB, BG, BR, BZ, CA, CN, CR, CU, CZ, DM, DZ, EE, GD, GE, HR, HU, ID, IL, IN, IS, JP, KP, KR, LC, LK, LR, LT, LV, MA, MG, MK, MN, MX, NZ, PL, RO, SG, SI, SK, TR, TT, UA, US, VN, YU, ZA, ZW.
- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(54) Title:** ANTI-DEFLAGRATING OPERATING ACTUATOR

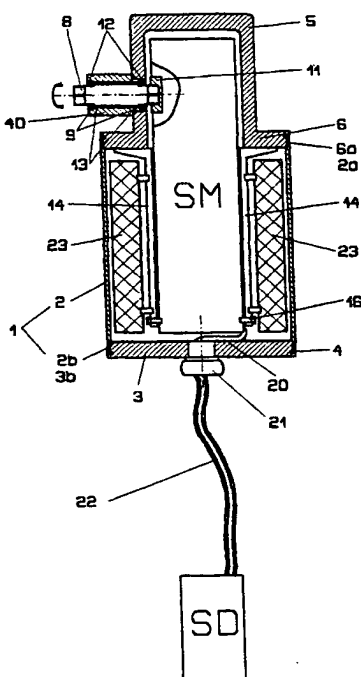

**(57) Abstract:** An anti-deflagrating operating actuator is disclosed, adapted to operate in environments where explosion risks occur, wherein both components that are subjected to electric voltage, and gear reducer, and the motion transmitting mechanism or the mechanism transforming rotary motion into linear motion, are integrally protected against deflagration.

**WO 01/15303 A1**

**ANTI-DEFLAGRATING OPERATING ACTUATOR**

The present invention refers to an actuator adapted to operate in environments with explosive atmosphere that is present in such an amount as to require special precautions when using electric, pneumatic or mechanical apparata.

An actuator in an environment with explosion risks must be able to withstand, according to the degree of risk associated with the type of atmosphere in which the actuator itself operates, the explosion force that is characteristic for any given gas or mixture.

According to the known prior art, there are several deflagration-protecting procedures for an actuator, each one of which being aimed to insulate the components that are prone to explode. In the specific case to which the present invention refers, the protection from deflagration is guaranteed by encapsulating the critical actuator parts into a suitable vessel equipped with outlets both for the connection of mechanical parts

transmitting the mechanical power and for the electric supply and control connections.

The geometric shape of the vessel, the volume ratio occupied by the components with respect to the internal volume of the housing containing them and the degree of uniformity of the free volume, are some of the design variables whose optimisation affects both the static response and the dynamic response of the actuator to an explosion. With respect to a possible detonation phenomenon, it is good practice to keep the free volume uniform inside the vessel, thereby avoiding the occurrence of precompression phenomena with following detonation. In the majority of times, a device results that is scarcely appreciated due to excessive overall dimensions with problems in placing it above all where the available space is reduced.

Object of the present invention is solving the above prior-art problems by providing an anti-deflagrating operating actuator, adapted to operate in an environment that is classified - according to the standards currently in force - as having the maximum explosion risk, such actuator providing the following features:

- both the components subjected to electric voltage, and the gear reducer, and the motion transmitting mechanism and/or the mechanism transforming the motion from rotary to linear one - in case of an actuator whose output motion is of the linear type - are integrally protected against deflagration;
- the external housing optimally coats the apparata contained therein, reproducing the outline of the contained parts, guaranteeing final reduced volume and weight, and keeping the free volume thereinto uniform, guaranteeing a reduced or even absent detonating effect;
- the outlets connecting the mechanical parts transmitting the mechanical power are ergonomically placed, guaranteeing an easy actuator installation next to walls;
- the outlets connecting electric supply and control connections are placed in such a way as not to interfere with the wiring resistance, thereby avoiding its kinking and the following stretching thereof;
- in case of an angular-operating actuator, the

motion transmission is direct, and is obtained through an intermediate connection shaft from the reducer shaft contained into the housing, to the user placed outside.

The above and other objects and advantages of the invention, as will appear from the following description, are obtained by an actuator as claimed in Claim 1. Preferred embodiments and non-trivial variations of the present invention are claimed in the dependent Claims.

The present invention will be better described by some preferred embodiments thereof, given as a non-limiting example, with reference to the enclosed drawings, in which:

- Figure 1 is a schematic side view of an anti-deflagrating operating actuator of the angularly operating type; and
- Figure 2 is a schematic side view of an anti-deflagrating operating actuator of the linearly operating type.

The angularly operating actuator of Fig. 1 is substantially composed of an half-shell 1 whose cylindrical mantle 2, that is smooth and free from interruptions, is equipped at both ends thereof with an internal threading section 2a and 2b with



an adequate length.

The opposite end of the cylindrical mantle 2 is closed through a plug 3 with a suitable thickness (s3) that is able to withstand, without distortions, the deflagration-induced force or anyway the design pressure to which the actuator is subjected; an hole or the holes that are necessary for the outside connection of the electric wiring 20, or the related connection, is/are possibly obtained on such plug 3. Next to the threaded coupling, a sealing ring 4 is placed. In a further embodiment of the actuator, the cylindrical mantle 2 is integral with the plug 3. In both cases, they are made of an aluminium alloy melt for shell casts.

An upper half-shell 5, made of an aluminium alloy melt for shell casts, is coupled with the half-shell 1 through a threaded flange 6, having an external threading 6a. This flange 6 operates as a support for the servomotor SM body.

The upper half-shell 5 is equipped with a threaded through-hole that is made of a plane section of the side surface and is coupled with a very thick cylindrical sleeve 40 through the threaded end. Next to the threaded coupling, a

sealing ring is placed.

This sleeve 40 is connected to a pin 8 made of stainless steel, such pin 8 transmitting the twisting torque, through the rolling bearings 9 arranged at the two ends of sleeve 40; these bearings 9 are placed with suitable coupling tolerances and are secured through resilient rings 12. The bearings 9, in addition to ensuring the axial centering of the stainless steel pin 8, are able to withstand the possible loads to which such pin 8 is subjected. At least two rings 13, inserted onto the pin 8, are sandwiched between pin 8 and sleeve 40.

The pin 8 is the outlet axis, being equipped with a seat shaped as a prism, and is adapted to transfer the twisting torque by means of the prism-shaped seat 11, integral to the servomotor SM, and perfectly matching the above-described prism-shaped groove.

The servomotor SM is projectingly secured to the threaded flange 6, this latter one being equipped with a suitable groove for sliding the servomotor body when assembling, by aligning its own outlet axis with the transmission axis through threaded fixings; two further brackets 14, integral

with the flange 6, allow stiffening the coupling between servomotor SM and housing, through suitable holes obtained at the end of each bracket 14 to secure the threaded pins 16 that are integral with the servomotor.

The fact of having made the servomotor SM integral with the flange 6 allows facilitating the assembling operation with the above-described half-shell 1. In fact, once having assembled the servomotor SM to the respective flange 6, both half-shell 1 and plug 3 are screwed; and after that, as last operation, the electric connection cable is secured through the cable-pressing device 21, this latter one being equipped with a suitable anti-deflagrating operating securing ring nut. The electric cable section 22 that connects the actuator at least till the first shunting box SD is contained into a suitable metallic tear-preventing sheath coated with PVC and with a mechanical seal.

The housing coats the servomotor placed inside it by employing a thickness increase next to the brackets 14 or by adding a volume of suitably dense material 23 where the housing volume that has remained free, particularly in the half-shell 1, is non-uniform with respect to the remaining volume,

above the threshold over which uncontrolled detonation phenomena can occur. It is clear that by adding the volume of material 23, it is possible to monitor the detonation by optimising the dynamic actuator response to deflagrations.

The linearly operating actuator of Fig. 2 is equipped with a box ST transforming the motion from rotary to linear one. This box ST is contained within the housing of the above-described type, being integral with the servomotor SM body.

A very thick cylindrical sleeve 50 is coupled with the flange 43 through the threaded end. This sleeve 50 is connected to a pin 44 made of stainless steel, equipped with a linear translation motion and going out of the motion-transforming box ST through the sliding bearings 45 arranged along the sleeve 50.

Both the final volume and the final weight of the angularly and linearly operating actuators are optimised; the outlets for connecting mechanical parts that transmit the mechanical power are placed in ergonomic positions, guaranteeing an easy actuator installation next to the walls; the outlets for connecting the electric supply and control connections are placed in order not to

impair the wiring efficiency, avoiding the kinking and following stretching thereof; in case of the angularly operating actuator, the angular motion transmission is direct, being obtained through an intermediate connection shaft from the reducer shaft, contained inside the housing, to an external user.

A simplified actuator is thereby obtained as regards the number of transmission components, having done without the use of intermediate linear motion transmissions such as the rack, this latter one being widely used in the prior art.

A further novelty obtained by the actuator of the present invention is that the two threaded couplings 2a-6a and 2b-3b between cylindrical mantle 2 and, respectively, flange 6 and circular plug 3, are realised through a left-handed threading SN and a right-handed threading DS, respectively. With such arrangement, it is possible to assemble the two half-shells 1 and 5 by simply rotating the cylindrical mantle 2 with respect to the plug 3 and the flange 6 with the advantage of removing the risk of kinking and stretching the electric wiring. In such a way, the assembly can strictly comply with a simplified procedure divided

into several mechanical and automatic steps, having done without the subjective handling intervention with unidirectional threaded elements.

An assembly of this type is available to be used in line with simple rotation steps of the cylindrical trunk and the only translation of the two plugs.

In a further variation of the invention, the brackets 14 that slide and support the motor are integrally obtained with the flange 6 through melting in an aluminium alloy shell for casts.

**CLAIMS**

1. Anti-deflagrating operating actuator, adapted to operate in an environment with explosion risks, characterised in that both components that are subjected to electric voltage, and a gear reducer, and a motion transmission mechanism and/or a mechanism transforming rotary motion into linear motion, are integrally protected against deflagration.
2. Anti-deflagrating operating actuator according to Claim 1, characterised in that an external protection housing optimally coats apparatus contained into the actuator, perfectly reproducing an outline of all parts contained into the actuator.
3. Anti-deflagrating operating actuator according to Claim 2, characterised in that a free volume inside the protection housing is kept uniform.
4. Anti-deflagrating operating actuator according to Claim 1, characterised in that outlets for connecting mechanical parts that transmit mechanical power are placed in ergonomic positions with reduced encumbrance.
5. Anti-deflagrating operating actuator according

to Claim 1, characterised in that outlets for connecting electric supply and control connections are placed in order not to impair wiring resistance, avoiding to kink and consequently to stretch the wiring.

6. Anti-deflagrating operating actuator according to Claim 1, characterised in that an angular motion transmission is direct.
7. Anti-deflagrating operating actuator according to Claim 5, characterised in that an electric connection cable is secured to the housing through a cable-pressing device (21) equipped with a suitable securing and anti-deflagrating operating ring nut.
8. Anti-deflagrating operating actuator according to Claim 5, characterised in that a section of the electric cable that connects the actuator at least up to a first shunting box is contained in a suitable metallic tear-preventing sheath, reinforced with PCT and with a mechanical seal.
9. Anti-deflagrating operating actuator according to Claim 3, characterised in that a housing volume remained free is made uniform by increasing a thickness next to brackets (14) supporting a servomotor (SM) or by filling the



housing volume with adequately dense material.

10. Anti-deflagrating operating actuator according to Claim 1, characterised in that two threaded couplings (2a-6a, 2b-3b) between a cylindrical mantle (2) and respective flanges (6) are realised respectively through a left-handed threading (SN) and a right-handed threading (DS).
11. Anti-deflagrating operating actuator according to Claim 1, characterised in that brackets (14) supporting a servomotor (SM) are integrally obtained with a flange (6) through melting in an aluminium alloy shell for casts.

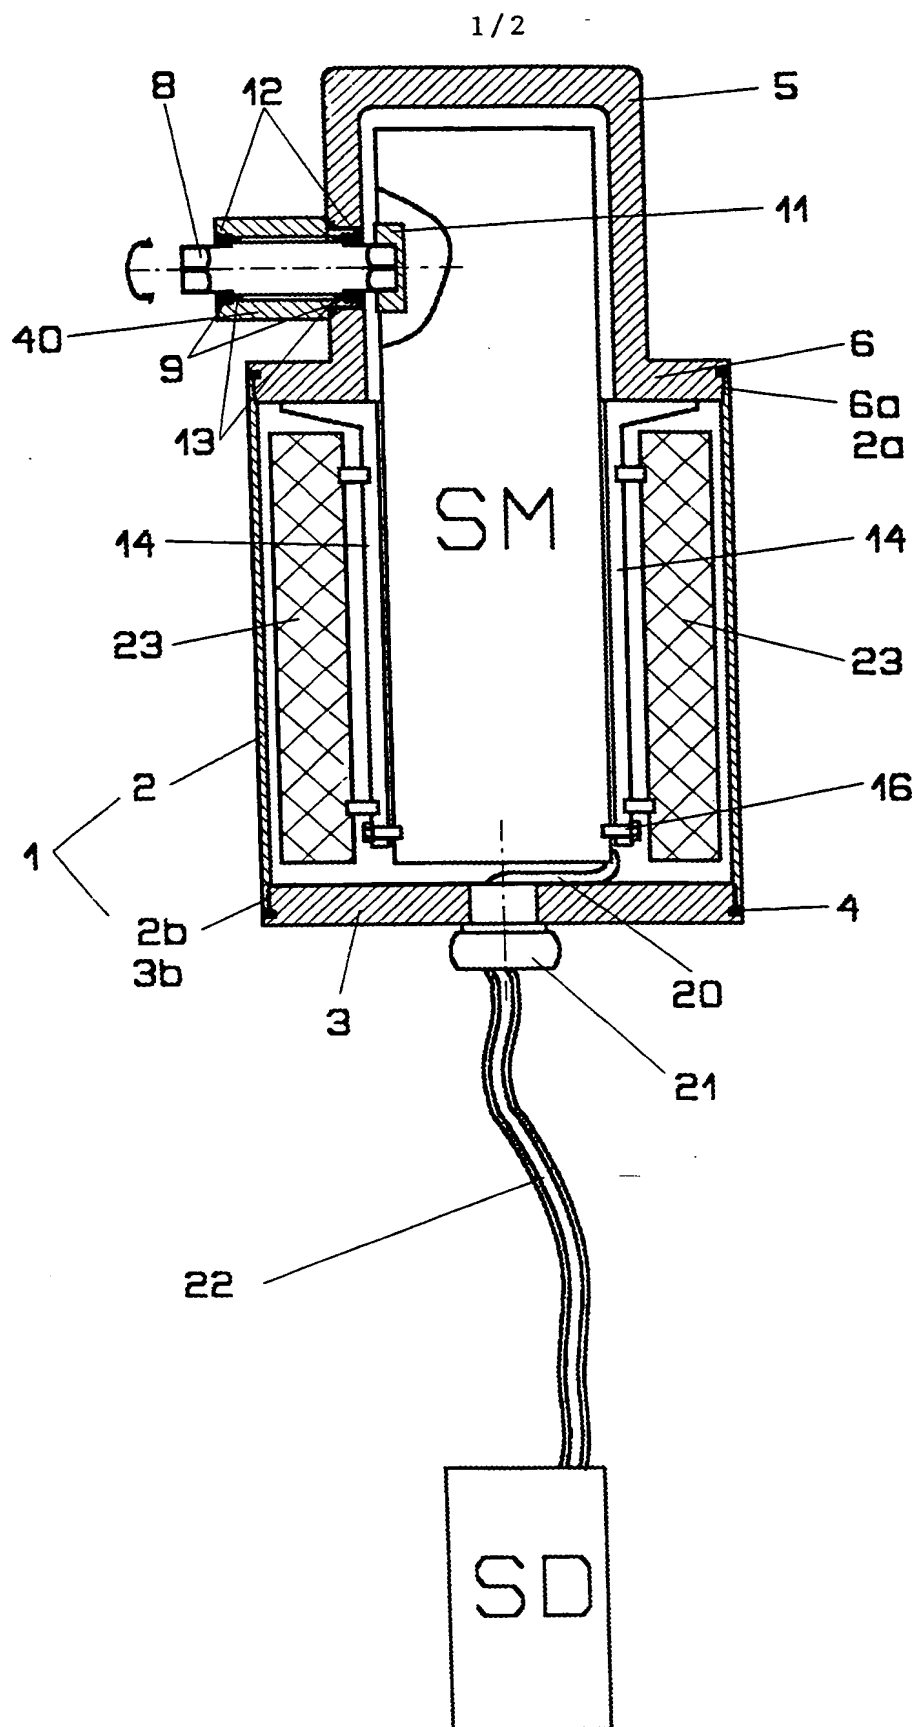


Fig. 1

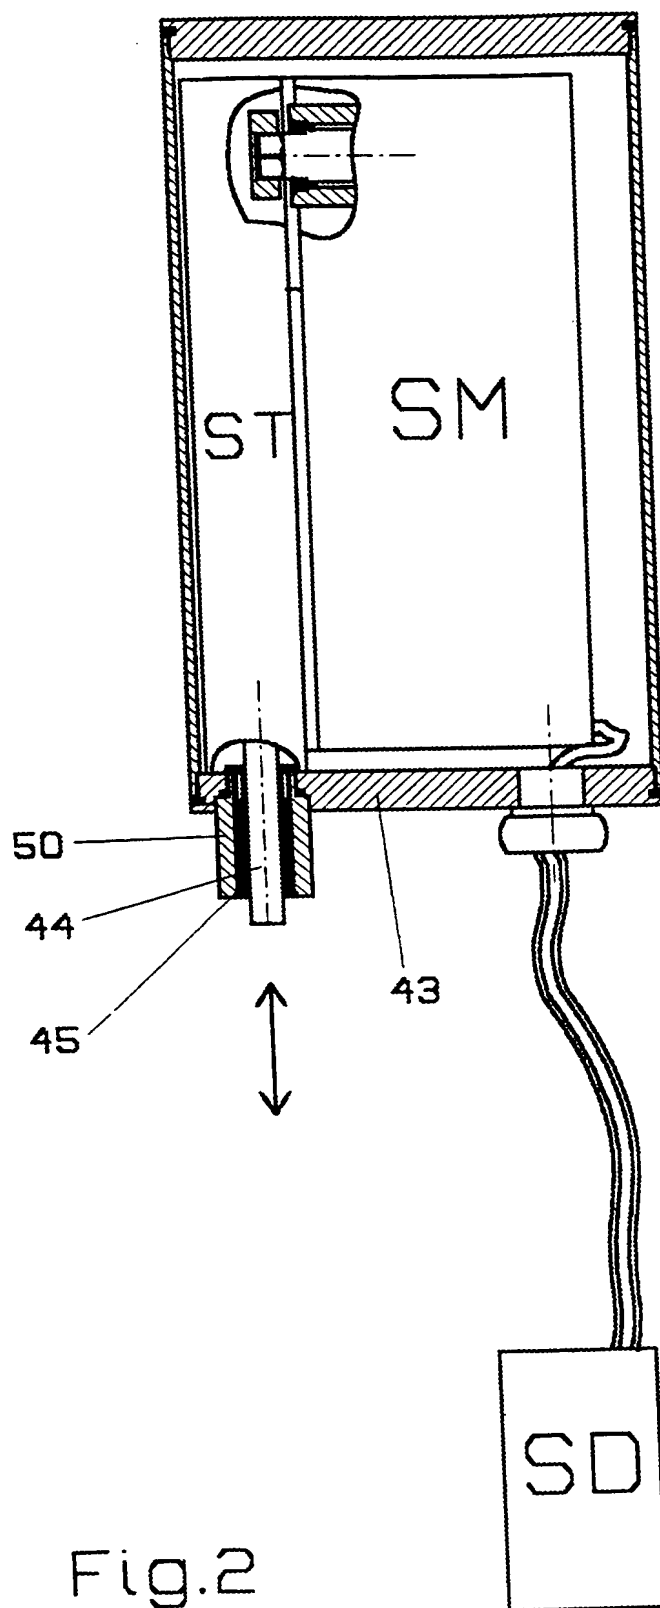


Fig.2

# INTERNATIONAL SEARCH REPORT

Intern. Application No  
PCT/IT 00/00318

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H02K5/136

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 325 659 A (WILLIAM A DOUGLAS) 13 June 1967 (1967-06-13)	1-4, 11
Y	the whole document	5, 7, 8
Y	GB 2 251 790 A (BEST INSPECTION LIMITED) 22 July 1992 (1992-07-22) page 3, line 22 -page 4, line 12	5, 7, 8
X	GB 2 230 392 A (CLIFFORD PETER DAVID; YOUNGE RUDER OSCAR) 17 October 1990 (1990-10-17) abstract	1
A	GB 2 303 972 A (LUTZ PUMPEN GMBH & CO KG) 5 March 1997 (1997-03-05) abstract; figure 3	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

24 November 2000

Date of mailing of the international search report

04/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ramos, H

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Appl. Application No

PCT/IT 00/00318

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3325659 A	13-06-1967	NONE	
GB 2251790 A	22-07-1992	NONE	
GB 2230392 A	17-10-1990	NONE	
GB 2303972 A	05-03-1997	DE 19527879 A FR 2737944 A	30-01-1997 21-02-1997

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>BPC206</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/IT 00/ 00318</b>	International filing date (day/month/year) <b>27/07/2000</b>	(Earliest) Priority Date (day/month/year) <b>19/08/1999</b>
Applicant <b>EDELWEISS ITALIA S.R.L. et al.</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 2 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

## 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

1  
☐ None of the figures.

## INTERNATIONAL SEARCH REPORT

International Application No

/IT 00/00318

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H02K5/136

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 325 659 A (WILLIAM A DOUGLAS) 13 June 1967 (1967-06-13)	1-4, 11
Y	the whole document	5, 7, 8
Y	GB 2 251 790 A (BEST INSPECTION LIMITED) 22 July 1992 (1992-07-22) page 3, line 22 -page 4, line 12	5, 7, 8
X	GB 2 230 392 A (CLIFFORD PETER DAVID; YOUNGE RUDER OSCAR) 17 October 1990 (1990-10-17) abstract	1
A	GB 2 303 972 A (LUTZ PUMPEN GMBH & CO KG) 5 March 1997 (1997-03-05) abstract; figure 3	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## ° Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

24 November 2000

Date of mailing of the international search report

04/12/2000

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ramos, H

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

/IT 00/00318

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US	3325659 A	13-06-1967	NONE	
GB	2251790 A	22-07-1992	NONE	
GB	2230392 A	17-10-1990	NONE	
GB	2303972 A	05-03-1997	DE 19527879 A FR 2737944 A	30-01-1997 21-02-1997